

01-31-00

A

01/27/00

jc759 U.S. PTO

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new non-provisional applications under 37CFR§1.53(b))		Attorney Docket No.	TAL:7146.042
		First Inventor or Application Identifier	Regis J. Crinon
		Title	METHOD OF SYNCHRONIZING EVENTS WITH A DIGITAL TELEVISION AUDIO-VISUAL PROGRAM
		Express Mail Label No.	EL472157750US


APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, D.C. 20231
--	--

1. <input checked="" type="checkbox"/> *Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification (preferred arrangement set forth below) <ul style="list-style-type: none"> <li>- Descriptive Title of the Invention</li> <li>- Cross References to Related Applications</li> <li>- Statement Regarding Federally Sponsored Research</li> <li>- Reference to Microfiche Appendix</li> <li>- Background of the Invention</li> <li>- Brief Summary of the Invention</li> <li>- Brief Description of the Drawings (if filed)</li> <li>- Detailed Description</li> <li>- Claim(s)</li> <li>- Abstract of the Disclosure</li> </ul>	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none"> <li>a. <input type="checkbox"/> Computer readable copy</li> <li>b. <input type="checkbox"/> Paper copy (identical to computer copy)</li> <li>c. <input type="checkbox"/> Statement verifying identity of above copies</li> </ul>
3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Pages 6]	7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))
4. Oath or Declaration [Total Pages 2] <ul style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</li> <li>b. <input type="checkbox"/> Copy from a prior application (37 CFR §1.63(d)) (for continuation/divisional with Box 16 completed)             <ul style="list-style-type: none"> <li>i. <input type="checkbox"/> Deletion of Inventor(s) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §§1.53(d)(2) and 1.33(b)</li> </ul> </li> </ul>	8. <input checked="" type="checkbox"/> 37 CFR §3.73(b) Statement <input checked="" type="checkbox"/> Power of Attorney when there is an assignee
* Note for Items 1 & 13: In order to be entitled to pay small entity fees, a small entity statement is required (37 CFR §1.27), except if one filed in a prior application is relied upon (37 CFR §1.28)	9. <input type="checkbox"/> English translation document (if applicable)
	10. <input type="checkbox"/> Information Disclosure Statement (IDS) /PTO 1449 <input type="checkbox"/> Copies of IDS Citations
	11. <input type="checkbox"/> Preliminary Amendment
	12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (should be specifically itemized)
	13. <input type="checkbox"/> *Small Entity Statements (PTO/sb/09-12) <input type="checkbox"/> Statement filed in prior application. Status still proper and desired.
	14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)
	15. <input checked="" type="checkbox"/> Other Check in the amount of \$994 Associate Power of Attorney

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_/\_\_\_\_  
 Prior application information: Examiner \_\_\_\_\_ Group No./Art Unit \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number or Bar Code Label (insert customer number or attach bar code label here)			or <input checked="" type="checkbox"/> Correspondence address below		
Name	Timothy A. Long				
Address	601 SW Second Avenue, Suite 1600				
City	Portland	State	OR	Zip Code	97204
Country	US	Telephone	(503) 227-5631	FAX	(503) 228-4373
Name (print type)	Timothy A. Long		Registration No. (Attorney/Agent)		28,876
Signature			Date	January 27, 1999	

jc584 U.S. PTO

09/492561

01/27/00

# METHOD OF SYNCHRONIZING EVENTS WITH A DIGITAL TELEVISION AUDIO-VISUAL PROGRAM

## 5 CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of U.S. Provisional Application No. 60/121,181, filed February 2, 1999.

## BACKGROUND OF THE INVENTION

10 The present invention relates to digital television and, more particularly, to a method and an apparatus for synchronizing events originating at a digital television receiver with instants of the audio, video, or data elements of a digital television program.

15 Digital television (DTV) affords the opportunity to augment the basic audio and video content that characterizes an analog television program. For example, a DTV program may include multiple audio and video elements. A DTV transmission may also include a number of data elements to provide ancillary services in conjunction with the visual and audio elements of a program. In addition, applications residing at the DTV receiver can generate events related to transmitted television program elements or ancillary services. An event refers to  
20 some action or behavior initiated by the DTV receiver. Examples of events include displaying a graphic button, generating a sound, or rendering data, which may have been transmitted to or generated at the receiver.

The scope of the ancillary services and applications that might be provided with DTV is largely undefined. The ATSC DIGITAL TELEVISION STANDARD,  
25 Advanced Television Systems Committee, Doc A/53, 12 Apr 95, 16 Sep 95, incorporated by reference herein, provides for program subtitles and a program

guide to be included in a DTV system. Program subtitles are analogous to the closed caption and emergency message services provided with NTSC (analog) television broadcasts. The program guide contains information about current and future programs.

- 5           The ATSC DATA BROADCAST SPECIFICATION, Advanced Television Systems Committee, ATSC T3-504, July 30, 1999, incorporated by reference herein, is a draft ATSC standard that defines data transmission that is compatible with the digital multiplex, MPEG-2 bit streams of the DTV system. Further, it specifies mechanisms necessary to allow applications resident at the receiver to
- 10 be associated with transmitted data elementary streams. Each data elementary stream is delivered in MPEG-2 transport stream packets referenced by a unique MPEG-2 transport stream packet identifier (PID). The PID is used to identify the elementary data streams included within the DTV transport bit stream. The specification does not attempt to define the nature of services and applications
- 15 that might be provided with the DTV system, but does anticipate that many of these services and applications will be synchronized to some extent with the video and audio elements of a program. The specification provides a suite of packetization formats, error protection schemes, and communication protocols for the delivery of asynchronous, synchronous, and synchronized, streaming and
- 20 non-streaming data services to facilitate these ancillary services and applications.

- In the DTV system, samples of a system time generated by a system clock are transmitted to a receiver. The system time is recovered at the receiver and synchronized to the timeline generated at the transmitter. The common time base for the encoder at the transmitter or emission station and the decoder at the
- 25 receiver facilitates synchronization of the presentation of the video, audio, and ancillary data service elements of a television presentation. The encoder periodically samples the value of the system time generated by the 27 MHz. system clock and includes the sample values (42 bits per sample) as program

clock references (PCR) in the transport stream data packets of one of the elementary streams (typically, the video elementary stream). At the receiver, the decoder uses the PCRs recovered from the data stream to construct the receiver's version of the system clock and synchronize it with the encoder's system clock.

5           The encoder also associates a presentation time stamp (PTS) and, optionally, a decoding time stamp (DTS) with each of the data access units within the elementary data streams. The PTS indicates the system time moment relative to the system timeline provided by the PCRs at which presentation is to occur. Typically, presentation refers to display of video and audio data, but presentation  
10   may refer to some other action related to the data in the data access unit. The DTS indicates the system time at which decoding of the data in the data access unit is to be undertaken. A DTS may not be provided with every data access unit, but in some cases may be inferred from the PTS assigned to another data access unit. In other cases, a DTS may be inferred from the PTS of the data access unit  
15   and a delay value either transmitted or predetermined indicating an elapsed time between the initiation of decoding and presentation. Therefore, the exact system time at which the data are to be decoded and presented so that the data are properly synchronized with a program video frame, video field or other instant of a program element is specified in the data elementary stream packets.

20           The system clock references and the time stamps used to synchronize the decoding and presentation of program elements in the transmitted data stream cannot easily be used to synchronize events or program elements outside the context of the data stream. The system clock is basically a counter and does not produce a value expressing time in any real sense. Further, the system clock time  
25   samples are inserted at the multiplexer that encodes the transport stream and the value of the system time at an instant of an audio, visual, or data program element is not known until the data for that instant is encoded and inserted in the transport data stream. As result, an author has no way of determining the appropriate

system time corresponding to an instant of an audio, video, or data element of a program at the time of program authoring. Furthermore, many applications that might be resident at the receiver may have been authored to operate with a coarser time resolution than provided by the 27MHz. system clock.

5           In program production, editors use timecodes recorded on the videotape or other storage medium as an application clock to synchronize video, audio, and data instants from several sources. A common timecode format used in program production is the SMPTE (Society of Motion Picture and Television Engineers) 12M timecode. The SMPTE timecode format effectively applies an electronic  
10 address, one frame in duration, to each frame of the videotape. The video editor identifies an instant of the video content by a value of the SMPTE timecode corresponding to that instant. In a post production environment, video and audio from several sources can be synchronized at a particular instant by referencing a particular SMPTE timecode value. While the SMPTE 12M timecode provides  
15 resolution to one frame, other timecodes may provide resolution to a video field or even finer.

          Similarly, MPEG-4 (CODING OF MOVING PICTURES AND AUDIO, ISO/IEC JTC1/SC29/WG11 N2995, International Standards Organization) content production utilizes an authoring system working with a timeline to synchronize  
20 various MPEG-4 elementary streams. Like SMPTE timecodes, the MPEG-4 timeline (also called the MPEG-4 scene time) will be sampled and captured as application time clock references in the authoring system.

          If the application timecodes were available at the receiver and synchronized to the presentation of the elements (i.e. access units) of the  
25 transmitted program elements, an author of an ancillary service could associate an event to an instant of a program element with the timecode. Then an application at the receiver could instigate the event in synchronization with presentation of the instant of the transmitted program element. However, the DTV

system does not provide for transmission of a timecode in synchronization with the transmitted program or for construction of a synchronized application time clock at the DTV receiver.

The ATSC DATA BROADCAST SPECIFICATION provides for downloading

5 data in a DTV system in accordance with the protocols of ISO/IEC 13818-6, INFORMATION TECHNOLOGY-GENERIC CODING OF MOVING PICTURES AND ASSOCIATED AUDIO: DIGITAL STORAGE MEDIUM- COMMAND AND CONTROL, ISO/IEC JTC1/SC29/WG11MEPEG96/N1300pl, July, 1996. The digital storage media-command and control (DSM-CC) standard provides a

10 protocol toolkit for data transmission. The DSM-CC standard provides a temporal addressing method called Normal Play Time (NPT) for associating the MPEG-2 program clock references (PCRs) of the DTV data stream with "VCR" like application time stamps referred to as Normal Play Time (NPT) time stamps. In the DSM-CC framework, PCRs (samples of the system time) are inserted into the

15 payload of data packets containing NPT reference descriptors (samples of the application time) so the system and application times can be associated. The Normal Play Time can be reconstructed at the receiver from the NPT reference descriptors and locked to the system clock derived from the PCRs. The NPT time stamp is transmitted asynchronously to the receiver at some time before the event

20 to identify the system time at which the event is to occur. An event is triggered when the system time matches the NPT time stamp for the event. Unfortunately, this method of transmitting a synchronizing application time moment requires that PCRs be generated and inserted into DSM-CC sections before or when the section enters the program multiplexer or encoder. Generating and inserting a

25 PCR at an arbitrary location in the bitstream is a difficult task for an MPEG-2 multiplexer. In addition, the DSM-CC NPT reference descriptors and stream event descriptors containing the NPT time stamp, must be conveyed in DSM-CC section structures which requires an additional packet identifier (PID) to identify the

transport packets carrying these descriptors in the DTV transport bit stream. A typical receiver can filter a limited number of PIDs and adding PIDs may complicate the receiver and increase its cost.

What is desired, therefore, is a method and apparatus for synchronizing receiver instigated events to instants of the transmitted video, audio, or data elements of a television program.

## SUMMARY OF THE INVENTION

The present invention overcomes the aforementioned drawbacks of the prior art by providing a method of synchronizing an event to an instant of a video, audio, or data element of a digital television program comprising the steps of generating a reconstructed application time including an application time moment that is a function of a current moment of a system time, a sample application time moment, and a sample moment of the system time associated with the sample application time moment; associating the event and the instant of the program element with a correlating application time, associating the correlating application time with a presentation moment of the system time for the instant, and instigating the event at a reconstructed application time corresponding to the correlating application time. The application time used to synchronize instants of the various elements of the program during production is reconstructed at the television receiver and temporally correlated or synchronized to the system time that synchronizes the presentation of instants of the transmitted elements of the DTV presentation. A moment of application time correlating a receiver instigated event and an instant of another program element is delivered to the receiver with an ancillary data service. Since the reconstructed application time and system time are synchronized, instigating the event at this correlating moment synchronizes it to the presentation of the instant of the program element. The sample application time and the correlating application time may be embedded in a single

synchronized data elementary stream. Alternatively, the correlating application time may be included in a separate asynchronous data stream permitting the data representing the event to be delivered periodically as pre-cached or pre-loaded data. In either case, events are initiated at the receiver by reconstructing the  
5 application time and instigating the event at a specified moment of the reconstructed application time.

A second aspect of the invention is an apparatus for synchronizing an event to an instant of a synchronized video, audio, and data program element comprising a system clock generating system time; an application clock  
10 generating application time; a sampler selecting a moment of the application time as an application time sample; an editor designating a correlating application time associating the event and the instant; a first data unit generator generating a first data unit comprising the application time sample and a first data unit presentation moment of system time; a second data unit generator generating a second data  
15 unit comprising the correlating application time; a third data unit generator generating a third data unit comprising the instant and a third data unit presentation moment of system time, the third data unit presentation moment associated with the correlating application time; a depacketizer to recover the application time sample, the first data presentation moment, the correlating  
20 application time, the instant and the third data unit presentation moment from the first, second, and third data units; an application time recovery unit generating a reconstructed application time including a moment equal to a function of the application time sample, the first data unit presentation moment, and a current system time moment; a presentation unit to present the instant at the third data  
25 unit presentation time, and a presentation engine to instigate the event when the reconstructed application time corresponds to the correlating moment. The apparatus can be constructed to convey the correlating application time moment and the application time samples in separate data streams. In another



embodiment of the apparatus, the correlating moment and time samples are transmitted to the receiver in a single synchronized data stream.

Additional aspects of the invention include a method and apparatus for reconstructing the application time at the television receiver and synchronizing the reconstructed application time to the system time of the DTV system. The application time is reconstructed and synchronized to the system time by the steps of generating the application time; generating the system time; selecting a reference moment of the application time; incorporating the reference moment in a data access unit having a data access unit presentation moment of system time; recovering the reference moment and the data access unit presentation moment from the data access unit; and adjusting a clock to produce a moment of the reconstructed application time equal to a function of the reference moment, the data access unit presentation moment, and a current moment of system time. Generating an application time at a DTV receiver that is locked to the system time permits an event to be instigated at the receiver by an application responding to a timecode provided by a program editor that specifies the application time moment at which the event is to occur.

To synchronize a receiver generated event to an instant of an audio, visual or data program element, the author may designate a correlating moment of application time for the event and the instant. The correlating application time moment is transmitted to the receiver in a synchronized or in an asynchronous data service. The synchronization provided by timecodes specifying moments of application time is destroyed by the DTV encoding process. However, the system time regulating presentation of an instant and the application time related to that instant can be associated by pushing the instant to the encoding multiplexer according to a schedule of application time or using the timecodes to synchronize the application clock. Instigation (triggering) of the event at the reconstructed application time corresponding to the correlating moment synchronizes the event

with the presentation of the program instant.

The foregoing and other objectives, features and advantages of the invention will be more readily understood upon consideration of the following detailed description of the invention, taken in conjunction with the accompanying  
5 drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a digital television transmitter or emission station  
10 implementing transmission of application time samples and correlating application times in separate data streams.

FIG. 2 is a block diagram of a digital television receiver instigating synchronized events from application time samples and correlating application times in separate data streams.

15 FIG. 3 is a block diagram of a digital television transmitter implementing transmission of application time samples and correlating application times in a single stream.

FIG. 4 is a block diagram of a digital television receiver instigating synchronized events from application time samples and correlating application times transmitted in a single data stream.  
20

FIG. 5 is an illustration of a reference descriptor for specifying a sample of application time.

FIG. 6 is an illustration of an event descriptor specifying a correlating application time of an event.

25 FIG. 7 is a block diagram of an application time recovery unit of a DTV receiver.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The production of a digital television (DTV) program involves the creation and combination of video elements, one or more audio elements and, optionally, related data services and applications. In the post production process, original  
5 optical source video from several sources may be combined, modified, and electronically generated video and audio added to produce the final release version of the production. Synchronization is essential to combining images, audio, and data from multiple sources. A timecode is used to synchronize the various elements of the program during its production. Video content is obtained  
10 from optical sources or generated electronically. If the original optical source footage is recorded on video tape, the timecode may be generated by the video camera and applied to the tape at the time of shooting. On the other hand, the timecode may generated by a separate timecode generator and added to the tape or other storage medium during editing. If the original footage is recorded on film,  
15 the timecode is added after the film has been converted to videotape for editing.

The SMPTE (Society of Motion Picture and Television Engineers) 12M timecode is commonly used in video program production but other timecodes specifying the timing of events against an application timeline are used. The SMPTE timecode applies an electronic address, one frame in duration, to each  
20 frame of the videotape. The timecode takes the form of an eight digit, twenty four-hour application time clock generating an application timeline with the timecode values specifying frames, seconds, minutes, and hours. A video editor (not illustrated) can specify the timing of an occurrence of a video, audio or data instant (for example, a video frame or field, or a sound) by designating the  
25 application time (specified by the timecode) of the occurrence of the instant. Likewise, the synchronized presentation of more than one instant can be established by designating a common or correlating moment of application time for the presentation of the multiple instants. In the present invention, the

application time is reconstructed and available at the DTV receiver and synchronized to the system time that regulates the presentation of instants of the elements of a program. An application at the receiver can instigate an event in synchronization with an instant of a program element by responding to a correlating application time moment designated by the program author as associating the event and the instant. An event refers to some action or behavior initiated by the receiver, including, for example, displaying a graphic button, generating a sound, rendering data which may have been transmitted to or generated locally at the receiver or passing data to some peripheral device.

10           A DTV system comprises a transmitter or emission station and a receiver. The digital television system is described by the ATSC DIGITAL TELEVISION STANDARD, Advanced Television Systems Committee, Doc A/53, 12 Apr 95, 16 Sep 95, incorporated by reference herein. A block diagram of a DTV transmitter or emission station 10 is illustrated in FIG. 1. For simplicity, the illustrated transmitter 10 is transmitting a single DTV program comprising single audio 12 and video 14 elementary streams and two ancillary data elementary streams 40 and 45. An actual emission station may transmit several programs simultaneously with each program comprising a plurality of elementary streams for each type of program element. In the transmitter 10, the elementary data streams for the video 14 and audio 12 program elements are compressed, formatted, packetized and multiplexed into a single transport bit stream 16. The digital television system employs compression techniques from the MPEG-2 toolkit and the video stream syntax specified in the MPEG-2 standard, ISO/IEC 13818-1, INFORMATION TECHNOLOGY - GENERIC CODING OF MOVING PICTURES AND ASSOCIATED AUDIO INFORMATION, International Standards Organization, 1995. Audio coding is in accordance with the DIGITAL AUDIO COMPRESSION STANDARD (AC-3), Advanced Television Systems Committee, Doc A/52, 16 Nov 94, 20 Dec 95.

Data related to ancillary data services are also transmitted in the transport bit stream 16. Ancillary data services can include control data, conditional access data that scrambles the program unless the decoder has the proper key, and data associated with program audio and video services, such as a program guide, emergency messages, and closed captioning services. In addition to the basic ancillary data services, the ATSC standard envisions transmission of additional ancillary or private data services. The ATSC DATA BROADCAST SPECIFICATION, Advanced Television Systems Committee, ATSC Doc. T3-504, July 30, 1999, is a draft ATSC standard defining specifications of data for compatible transmission with the digital multiplex, MPEG-2 bit streams of the DTV system. Further, it specifies signaling mechanisms necessary to allow applications to be associated with the data elementary streams of a program. The draft specification anticipates that many ancillary services and applications will be synchronized to some extent with the audio or visual elements of a transmitted DTV program. For this purpose, the specification defines packetization, error protection schemes and protocols for the delivery of asynchronous, synchronous, and synchronized, streaming and non-streaming data elementary streams to support these services and applications.

At the transmitter 10, the source video 14 and audio 12 data streams are obtained from their respective media sources. For example, a videotape machine 17 is a typical source of the video 14 and audio 12 elements of a television program. The video 14 and audio 12 source data is transferred to the video 18 and audio 20 encoders according to an application time schedule established by the author. Application time is a time line generated by an application time clock 22 sampling values from the timecode stored with the data for the program element during editing. In the video 18 and audio 20 application encoders, the data is compressed, encoded, and formatted to reduce the data that must be transmitted.

The application data 24 for an ancillary data service elementary stream is obtained from a source and may be stored in a data server 26. The ancillary data service elementary stream data is pushed to a data access unit generator 28 which generates data access units according to a buffer model for the decoder in the DTV receiver. The data access units are packetized by a packetizer 30 according to one of the protocol encapsulation, packetization, synchronization, and protection layers defined in the ATSC DATA BROADCAST SPECIFICATION. Data related to synchronous or synchronized data services are pushed to the program multiplexer 32 by the data server 26 at application times designated by the author and specified by the application timecodes for the program.

In the program multiplexer 32, the several packetized elementary streams are multiplexed into a single transport bit stream 16 and timing information is added to the transmitted video, audio, and data program elements to preserve the synchronization of the various program elements lost in the multiplexing operation. A 27 MHz. system clock 34 is sampled and the samples (program clock references or PCRs) are included in transport data packets of the transport bit stream 16 (typically the transport data packets for the video element of the program) before transmission. The PCRs are used to reconstruct a system clock at the receiver that generates a system timeline synchronized to the system timeline produced by system clock 34 at the emission station 10.

A presentation time stamp (PTS) and, optionally, a decoding time stamp (DTS) is associated with each of the data access units within the elementary data streams by the program multiplexer 32. The PTS indicates the system time moment relative to the system timeline provided by the PCRs at which presentation is to occur. Typically, presentation refers to display of video and audio data, but presentation may refer to some other action related to the data in the data access unit. The DTS indicates the system time at which decoding of the data in the data access unit is to be undertaken. A DTS may not be provided with

every data access unit, but in some cases may be inferred from the PTS assigned to another data access unit. In other cases, a DTS may be inferred from the PTS of the data access unit and a delay value either transmitted or predetermined indicating an elapsed time between the initiation of decoding and presentation.

- 5 Therefore, the exact system times at which the data are to be decoded and presented so that presentation of the instant is properly synchronized with other elements of the program are specified in the data elementary stream packets.

While the timecodes providing synchronization of the instants of the various program elements are not transmitted and the synchronization provided by the  
10 timecodes is destroyed, an association between the presentation of the instant is retained. Pushing the data for an instant of a program element to an appropriate encoder at an application time schedule adjusted for the time required to encode the data associates the presentation time specified by the PTS to the application time for the instant. Likewise, synchronizing the application clock to the values of  
15 application time specified by the timecodes before encoding can provide an association between the moment of presentation of the instant and the original application time for that instant.

The transport bit stream 16 is passed to a modem subsystem 42 for modulation and transmission. In terrestrial broadcast television the modem  
20 subsystem 42 may be a radio frequency transmission system which uses the digital data in the transport bit stream to modulate a transmitted signal 44. Other modem systems could be used for satellite or cable transmission and, at least some systems are expected to include two-way communication for interactivity.

Referring to FIG. 2, the transmitted signal 44 is received at a receiver 50  
25 where the signal is demodulated in a modem subsystem 52. The resulting transport bit stream with error signaling 54 is forwarded to the transport depacketization and demultiplexing subsystem (demultiplexer) 56 where the elementary bit streams for each of the program elements are recovered. The

audio 58 and video 60 data access units are decoded in their respective audio 62 and video 64 decoders and the data is forwarded to the presentation subsystem 66 for presentation to the user. The data access units of the ancillary data service elementary stream are passed to the data access unit decoder 70 before being  
5 rendered in the data presentation engine 78. The data presentation engine 78 may send the data to the presentation subsystem 66 for display to the user or the data may be used in some other way, for example downloaded to a peripheral device for performing some function.

In a system clock recovery subsystem 72, the PCRs are recovered from the  
10 data stream and are used in a phase lock loop mechanism to reconstruct the system time clock 34. In other words, the output of system clock recovery subsystem 72 is a system timeline synchronized to the timeline produced by the system clock of the transport stream encoder or program multiplexer 32 of the transmitter 10. Decoding and display of access units for synchronized data  
15 services recovered from the transport data stream 16 occurs when the system time moment specified by the DTS or PTS, respectively, of the data access unit corresponds to a system time moment generated by the system clock.

Referring again to FIG. 1, in a first embodiment of the present invention samples from an application time clock 22 are included in a synchronized data  
20 stream 45 that is separate from the data stream 40 in which data for ancillary data services, including the receiver resident application, is transported. A clock sampler 46 samples the application time produced by the application clock 22. The sample value is adjusted to take into account the fixed delay introduced by the packetization process of the data server 26. Each resulting sample  
25 application time moment or application clock reference is captured in an application clock reference (ACR) descriptor 100, as illustrated in FIG. 5. A data access unit generator 48 generates data access units containing the application clock references. When the application clock references are provided in a



separate data elementary stream, the ACR reference descriptor 100 may be the only payload of the data access unit. The data access unit may be transmitted by means of packetized elementary stream (PES) packets (in the case of a streaming, synchronized data service) or synchronized DSM-CC sections as described in ISO/IEC 13818-6, INFORMATION TECHNOLOGY-GENERIC CODING OF MOVING PICTURES AND ASSOCIATED AUDIO: DIGITAL STORAGE MEDIUM - COMMAND AND CONTROL, ISO/IEC JTC1/SC29/WG11MEPEG96/N1300pl, International Standards Organization, July, 1996 (in the case of a non-streaming, synchronized data service). The value of the ACR descriptor 100 specifies the value of the sample application time moment to be associated with the presentation time moment (the PTS) of the synchronized data access unit that contains the descriptor. When the ACR descriptor 100 is included in a PES packet, the five byte PTS field (including the marker bits) is included in the header of the PES packet and the data access unit including the ACR descriptor 100 is conveyed in the payload bytes of the PES packet. When the DSM-CC section is utilized, the ACR descriptor 100 is conveyed in the downloadDataBlock message of the section payload and the five byte PTS field (including the marker bits) is included in the dsmccAdaptationHeader structure of the dsmccMessageHeader of the DSM-CC section, as specified in Final Draft Amendment to ISO/IEC 13818-6, Document ISO/IEC JTC 1/SC 29/WG 11/N3052, December 1999. A packetizer 49 packetizes the data access units containing the application clock references and pushes the packets to the program multiplexer 32 at the application time specified in the data access unit. As it does with other synchronized data, the program multiplexer generates a PTS that is added to the data packet. The data server 26 and program multiplexer 32 form a generator of data units containing a sample application time or application clock reference associated with a corresponding system time moment from the 90 kHz. resolution portion of the system timeline. The 27 MHz. resolution of the system clock is reduced to a 90 kHz. resolution because the PTS field captures only the

33 most significant bits of the 42 bit PCR field produced by the system clock 34. While the data streams making up the elements of a program are illustrated as separate streams in FIG. 1, the separation of the streams in the program multiplexer 32 is a logical separation and the application time samples could be inserted into the packets of one of the other streams, for example the video stream.

Referring again to FIG. 2, the transport bit stream containing the application time clock references is transmitted 44 to the receiver 50 where a reference descriptor access unit acquisition subsystem 74 recovers the data access units containing the ACR references 102 and their respective PTSs. The PTS and the application time clock reference (ACR\_Reference) 102 in an ACR reference descriptor 100 are used by an application time recovery system 76 to reconstruct the current application clock and lock it with the system time. The application time may be determined, for example, by the following equation:

$$ACR_k = CONVERT ((STC_k / 300) - PTS) + ACR\_Reference$$

where:  $ACR_k$  =  $k^{th}$  value of application time

$STC_k$  = the current moment of system time (reconstructed at the receiver from the 42-bit PCRs (27 MHz. resolution) transmitted in one of the elementary streams of the program

PTS = the presentation time stamp (33-bits) of the data access unit that includes the associated sample application time moment (ACR\_Reference)

ACR\_Reference = the application clock reference or sample application time moment contained in the data access unit having a system presentation moment of PTS

The function CONVERT() maps the 90 kHz. portion of the system time to the application time. The CONVERT function is characterized by the field

ACR\_Format 104 in the ACR descriptor 100, as illustrated in FIG. 5. The conversion performed by the CONVERT() operator may include a change in resolution as the application clock reference may be of lower resolution than the 90 kHz. resolution provided by the PTS. If the 90 kHz. system time is a multiple  
5 integer of the application time unit frequency, this operation can be implemented using a simple right-shift bit operation. If the application time clock resolution or application time unit frequency is the conventional video frame resolution (29.97 Hz.), the CONVERT() operation is a division by 3003 (or 0x0BBB in hexadecimal). To engage the proper CONVERT() operation, the value of the  
10 ACR\_Format field 104 in the descriptor 100 signals the resolution of the application clock references.

The application time recovery unit 76 may be implemented in software or in hardware. A block diagram of a hardware implementation of the application time recovery unit 76 is illustrated in FIG. 7. An output of the system clock recovery  
15 unit 72 is an analog signal 120 with a beat frequency equal to the system time resolution (27 MHz.). This output is input to a divider 122 and divided by 300 to produce a signal with a frequency of 90 kHz. The output of the divider 122 is divided again in a divider 124 by a divisor sufficient to perform the CONVERT () function. The output of the divider 124 is a trigger signal 128 with a frequency  
20 equal to the time unit frequency of the application clock.

The output of the system clock recovery unit 72 is also input to a counter 130 which produces samples of the system time 132 at 90 kHz. The samples of the system time 132 are input to a mask 133 that retains the most significant 33 bits of the sample system time. The most significant 33 bits of a  
25 system time moment is equivalent to the PTS for that moment.

An application time sample moment specified by an application clock reference 134 and an associated PTS 136 are recovered from the PES packet or DSM-CC section in which they were transmitted by the reference descriptor

acquisition unit 74 (as illustrated in FIG. 2) or reference descriptor acquisition unit 94 (as illustrated in FIG. 4). The application clock reference 134 and the associated PTS 136 are input, respectively, to the ACR\_Reference register 138 and PTS register 140. The associated PTS 136 in the PTS register 140 is compared in a comparator 141 to the 33 most significant bits of the system time sample produced by the mask 133. If the values are equal, the content of the ACR\_Reference register 138 is loaded into the counter 142 to initialize the counter 142 and output by the counter 142 as the current moment of reconstructed application time 144. The frequency of transmission of application clock references 134 and, therefore, the frequency of initialization of the counter 142 is discretionary with service provider. However, if there is a discontinuity of application time the counter 142 must be re-initialized to the correct application time. Once initialized, the counter 142 is incremented by the triggering signal 128 at the time unit frequency or resolution of the application clock. The application time 144 is passed from the application time recovery unit 76 to the data presentation engine 78.

The data access units of the ancillary data stream are recovered and decoded in the data access unit decoder 70. The data access units are passed to the data presentation engine 78 where the value of the correlating application time moment in the eventACR field 112 is compared to the values of the reconstructed application time produced by the application time recovery unit 76. When the reconstructed application time and the correlating application time moment for the event correspond, the application causes the data presentation engine 78 to instigate the event. Since the event is instigated in response to the correspondence of the correlating application time and a moment of the reconstructed application time, the data specifying the correlating application time can be transmitted to the receiver in an asynchronous data stream and delivered as pre-cached or pre-loaded data in anticipation of that moment of the

reconstructed application time. Since the application time clock is temporally correlated or synchronized to the system time clock through the PTSs, instigation of the event at the correlating application time moment synchronizes the instigation with an instant of the audio, visual or other program content being presented in response to a system time stamp. The event may cause data to be presented to the user by the presentation system 66 or utilized in some other manner by the receiver (for example, data might be forwarded to an auxiliary device for some action).

In a second embodiment of the invention, the application time reference and data specifying the event are embedded in an existing synchronized data elementary stream for transmission. Including all of the data in a single data elementary stream simplifies the transport bit stream 16. A transmitter 82 employing this second technique is illustrated in FIG. 3. Like or identical elements to those employed in the first embodiment are denoted by the same reference numerals. Sample application time moments, specified as application clock references, taken by the application clock sampler 46 are included in the application data 83 of a synchronized ancillary data service elementary stream as it is pushed by the data server 26. The delivery of the packets from the data server 26 to the program multiplexer 32 occurs as described above for the data packets produced by packetizer 49. In a synchronized stream, the presentation time of a data unit has a temporal relationship to the presentation times of other data units in the stream in which it is included or other streams with which that stream is synchronized. Each ACR reference descriptor 100 containing a sample application time moment or application clock reference 102 is embedded at a defined location in a data access unit with associated ancillary service data of the synchronized ancillary data service stream 84. The data access units may be conveyed either as a streaming or non-streaming synchronized data service. The video 36, audio 38, and ancillary data service 84 data are pushed to the program

multiplexer 32 as described above. The elementary stream data is packetized and the value of the PTS fields specifying the system time moment for presentation of the data are set in the packet header bytes.

Referring to FIG. 4, at the receiver 90, the transport bit stream is demultiplexed 52 to recover and decode the audio 58 and video 60 data for presentation at the system clock time value specified by the PTS. The PCRs are extracted from the transport data stream and the system clock is recovered. The ancillary data service data access units are recovered and re-assembled in the data access unit acquisition buffer 92.

Embedded ACR reference descriptors 100 containing the application clock references (ACR\_Reference) 102 and corresponding PTSs are recovered from the data access units 94 and the packet header bytes, respectively. The application clock references and associated PTSs are utilized by the application clock recovery unit 76 to reconstruct the application clock and lock it to the system clock. The correlating application time moment recovered from the transport bit stream 54 is sent to the data presentation engine 78 from the data access unit acquisition buffer 92 where it is compared to the application time produced by the application time recovery unit 76. When the application time corresponds to the correlating application time moment designated by the author an application instigates the identified event 110 which is presented in association with the instant of the audio, video, or data program element having a corresponding PTS.

All the references cited herein are incorporated by reference.

The terms and expressions that have been employed in the foregoing specification are used as terms of description and not of limitation, and there is no intention, in the use of such terms and expressions, of excluding equivalents of

What is claimed is:

1. A method of instigating an event at a television receiver comprising the steps of:
  - 5 (a) generating a reconstructed application time including an application time moment that is a function of a current moment of a system time, a sample application time moment, and a sample moment of a system time associated with said sample application time moment; and
  - 10 (b) instigating said event at a moment of said reconstructed application time.
2. A method of synchronizing an event to an instant of at least one of a video, audio, and data program element comprising the steps of:
  - 15 (a) generating a reconstructed application time including an application time moment that is a function of a current moment of a system time, a sample application time moment, and a sample moment of a system time associated with said sample application time moment;
  - (b) associating said event and said instant with a correlating application time;
  - 20 (c) associating said correlating application time with a presentation moment of said system time for said instant; and
  - (d) instigating said event at said reconstructed application time corresponding to said correlating application time.
- 25 3. The method of claim 2 wherein said sample moment of said application time is associated with said sample moment of said system time by the step of incorporating said sample moment of said application time in a data unit to be

presented at a presentation moment approximately corresponding to said sample moment of said system time.

4. The method of claim 2 wherein the step of associating said correlating  
5 application time with said presentation moment for said instant comprises the  
step of incorporating said instant in a data unit at approximately said  
correlating time, said data unit to be presented at said presentation moment.
5. The method of claim 2 further comprising the step of presenting said instant at  
10 said presentation moment.
6. A method of synchronizing an event to an instant of at least one of a video,  
audio, and data program element comprising the steps of:
  - 15 (a) associating a sample application time moment with a sample system  
time moment;
  - (b) using said associated sample application time moment and said  
sample system time moment to synchronize a reconstructed  
application clock and a system clock;
  - 20 (c) associating said event and said instant of said program element with  
a correlating application time moment;
  - (d) relating said correlating application time moment and a presentation  
moment of said system time for said instant; and
  - 25 (e) instigating said event at a time moment generated by said  
reconstructed application clock corresponding to said correlating  
application time moment.
7. The method of claim 6 wherein said sample application time moment is  
associated with said sample system time moment by the step of incorporating



said sample application time moment in a data unit to be presented at said sample system time moment.

8. The method of claim 7 wherein the step of incorporating said sample application time moment in a data unit to be presented at said system time moment comprises the steps of:

(a) selecting a moment from an application timeline generated by an application clock;

(b) determining said sample application time moment by adjusting said selected moment for a period required to generate said data unit;

(c) incorporating said sample application time moment in said data unit at said sample application time moment; and

(d) timestamping said data unit for presentation at said sample system time moment.

9. The method of claim 6 wherein synchronization of said reconstructed application clock and said system clock comprises the steps of:

(a) comparing a current system time moment to said sample system time moment; and

(b) setting a current moment of time generated by said reconstructed application clock equal to said associated sample application time moment when said current system time moment corresponds to said sample system time moment.

10. The method of claim 6 wherein the step of relating said correlating application time moment and said presentation moment of said system time for said instant comprises the step of incorporating said instant in a data unit at approximately said correlating application time moment, said data unit to be presented at said presentation moment.

11. The method of claim 6 further comprising the step of presenting said instant at said presentation moment of said system time.

5 12. A method of synchronizing an event at a digital television receiver to an instant of at least one of a transmitted video, audio, and data television program element comprising the steps of:

- 10 (a) incorporating a sample application time moment in a first data unit to be presented at a first data unit presentation moment of a system time;
- (b) employing said sample application time moment and said first data unit presentation moment to synchronize a reconstructed application time at said receiver to said system time;
- 15 (c) correlating said event and said instant with a correlating moment of application time;
- (d) transmitting said instant to said receiver in a second data unit having a second data unit presentation moment of system time associated with said correlating moment of said application time;
- 20 (e) presenting said instant at said second data unit presentation moment; and
- (f) instigating said event when said reconstructed application time corresponds to said correlating moment.

25 13. The method of claim 12 wherein said step of incorporating said sample application time moment in said first data unit to be presented at said first data unit presentation moment of said system time comprises the steps of:

- (a) selecting a moment from an application timeline generated by an application clock;
- (b) determining said sample application time moment by adjusting said

selected moment for a period required to generate said first data unit; and

(c) incorporating said sample application time moment in said first data unit at approximately said sample application time moment.

5

14. The method of claim 12 wherein the step of employing said sample application time moment and said first data unit presentation moment to synchronize said reconstructed application time at said receiver to said system time comprises the steps of:

10 (a) comparing a current system time to said first data unit presentation moment; and

(b) setting a current moment of said reconstructed application time equal to said sample application time moment when said current system time corresponds to said first data unit presentation moment.

15

15. The method of claim 12 wherein the step of transmitting said instant to said receiver in said second data unit having said second data unit presentation moment of system time associated with said correlating moment of said application time comprises the steps of:

20 (a) encoding said instant in said second data unit at approximately said correlating application time;

(b) timestamping said second data unit for presentation at said second data unit presentation moment; and

(c) transmitting said second data unit to said receiver.

25

16. The method of claim 12 further comprising the steps of:

(a) specifying said correlating moment in a third data unit; and

(b) transmitting said third data unit to said receiver in anticipation of said correspondence of said reconstructed application time and said correlating moment.

5     17. The method of claim 12 further comprising the step of specifying said correlating moment in either of a third data unit having a third data unit presentation moment and said first data unit, said third data unit presentation moment having a temporal relation to said first data unit presentation moment.

10    18. A method of synchronizing an event at a television receiver to an instant of at least one of a transmitted video, audio, and data program element comprising the steps of:

(a) generating a system time;

(b) generating an application time;

15    (c) selecting a sample moment of said application time;

(d) incorporating said sample moment of said application time in a first data unit to be presented at a first data unit presentation moment of said system time;

20    (e) generating a reconstructed application time synchronized to said system time by said sample moment and said first data unit presentation moment;

(f) associating said event and said instant of said program element with a correlating moment of said application time;

25    (g) associating said correlating moment with an instant presentation moment;

(h) presenting said instant at a system time corresponding to said instant presentation moment; and

(i) instigating said event at a moment of said reconstructed application time corresponding to said correlating moment.

5 19. The method of claim 18 wherein the step of generating said reconstructed application time synchronized to said system time by said sample moment and said first data presentation moment comprises the steps of:

- (a) comparing said system time to said first data unit presentation moment;
- 10 (b) initializing said reconstructed application time to said sample moment when said system time corresponds to said first data unit presentation moment; and
- (c) incrementing said reconstructed application time at an application time unit frequency.

15 20. The method of claim 19 wherein the step of incrementing said reconstructed application time at an application time unit frequency comprises the steps of:

- (a) dividing a signal having a system time unit frequency to obtain a trigger signal having said application time unit frequency; and
- 20 (b) incrementing said reconstructed application time in response to said trigger signal.

21. The method of claim 18 wherein the step of selecting said sample moment of said application time comprises the step of selecting a moment of said application time adjusted for a period required to create said first data unit.

25

22. The method of claim 18 wherein the step of associating said correlating moment with said instant presentation moment comprises the steps of:

- (a) encoding said instant in a second data unit at approximately said correlating moment and

(b) timestamping said second data unit for presentation at a system time corresponding to said instant presentation moment.

23. The method of claim 18 further comprising the steps of

- 5           (a) incorporating said correlating moment in a second data unit; and  
          (b) transmitting said second data unit to said receiver.

24. The method of claim 23 wherein said second data unit is transmitted to said receiver prior to said reconstructed application time corresponding to said correlating moment.

10

25. The method of claim 18 further comprising the step of specifying said correlating moment in either of said first data unit and a second data unit having a second data unit presentation moment and, said second data unit presentation moment having a temporal relation to said first data unit presentation moment.

15

26. The method of claim 18 further comprising the steps of:

20           (a) specifying said correlating moment in a second data unit having a second data unit presentation moment having a temporal relation to said first data unit presentation moment; and  
          (b) including said second data unit and said first data unit in a common stream of data units

25   27. A method of generating a reconstructed application time synchronized to a system time comprising the steps of:

          (a) generating an application time;  
          (b) generating a system time;  
          (c) selecting a reference moment of said application time;

- (d) incorporating said reference moment in a data access unit having a data access unit presentation moment of said system time;
- (e) recovering said reference moment and said data access unit presentation moment from said data access unit; and
- 5 (f) adjusting a clock to produce a moment of said reconstructed application time equal to a function of said reference moment, said data access unit presentation moment, and a current moment of said system time.

10 28. A clock to generate a reconstructed application time synchronized to a system time comprising:

- (a) an application clock generating an application time;
- (b) a sampler designating a moment of said application time as a reference moment;
- 15 (c) a packet generator to incorporate said reference moment in a data access unit having a data access unit presentation moment of said system time;
- (d) a depacketizer to recover said reference moment and said data access unit presentation moment from said data access unit; and
- 20 (e) an application time recovery unit generating said reconstructed application time including a moment equal to a function of said reference moment, said data access unit presentation moment, and a current moment of said system time.

25 29. An application clock comprising:

- (a) a system time signal having a system time unit frequency;
- (b) a divider dividing said system time unit frequency to produce a trigger signal having an application time unit frequency; and

(c) a counter incremented by said trigger signal to output an application time moment.

30. The apparatus of claim 29 further comprising:

- 5 (a) a system time counter to construct a system time from said system time signal;
- (b) a mask to reduce a resolution of said system time;
- (c) a comparator to compare a moment of said reduced resolution system time to a presentation time stamp; and
- 10 (d) a register to load an application time moment associated with said presentation time stamp into said counter when said presentation stamp and said moment of reduced resolution system time correspond.

15 31. An apparatus for synchronizing an event to an instant of at least one of a synchronized video, audio, and data program element comprising:

- (a) a system clock generating a system time;
- (b) an application clock generating an application time;
- (c) a sampler selecting a moment of said application time as an
- 20 application time sample;
- (d) an editor designating a correlating application time associating said event and said instant;
- (e) a first data unit generator generating a first data unit comprising said application time sample and a first data unit presentation moment of
- 25 said system time;
- (f) a second data unit generator generating a second data unit comprising said correlating application time;
- (g) a third data unit generator generating a third data unit comprising said instant and a third data unit presentation moment of said



system time, said third data unit presentation moment associated with said correlating application time;

(h) a depacketizer to recover said application time sample, said first data presentation moment, said correlating application time, said instant, and said third data unit presentation moment from said first, second, and third data units;

(i) an application time recovery unit generating a reconstructed application time including a moment equal to a function of said application time sample, said first data unit presentation moment, and a current system time moment;

(j) a presentation unit to present said instant at said third data unit presentation time, and

(k) a presentation engine to instigate said event when said reconstructed application time corresponds to said correlating moment.

32. The apparatus of claim 31 wherein said second data unit further comprises a descriptor of said event.

33. The apparatus of claim 31 wherein said second data unit generator comprises:

(a) a access unit generator constructing a payload for said data unit comprising said application time sample;

(b) a data server directing said access unit generator to construct said payload at a moment of said application time approximately corresponding to said application time sample; and

(c) a multiplexer adding a header comprising said second data unit presentation time to said payload.

34. An apparatus for synchronizing an event to an instant of at least one of a

synchronized video, audio, and data program element comprising:

- (a) a system clock generating a system time;
- (b) an application clock generating an application time;
- (c) a sampler selecting a moment of said application time as an  
5 application time sample;
- (d) an editor designating a correlating moment associating said event  
and said instant;
- (e) a data unit generator generating a data stream comprising at least  
one data unit including said application time sample, an application  
10 time sample presentation moment, said instant, an instant  
presentation moment, and said correlating moment;
- (f) a depacketizer to recover said application time sample, said  
application time sample presentation moment, said correlating  
moment, said instant and said instant presentation moment from  
15 said data stream,
- (g) an application time recovery unit generating a reconstructed  
application time including a moment equal to a function of said  
application time sample, said application time sample presentation  
moment, and a current system time moment;
- (h) a presentation unit to present said instant at said instant  
20 presentation moment, and
- (i) a presentation engine to instigate said event when said reconstructed  
application time corresponds to said correlating moment.

25 35. A method of synchronizing an event at a digital television receiver to an instant  
of at least one of a transmitted video, audio, and data television program  
element comprising the steps of:


- (a) correlating said event and said instant with a correlating moment of  
application time;

- 5 (b) incorporating a sample application time moment in a data unit for presentation at a sample application time presentation moment of a system time;
- (c) employing said sample application time moment and said sample application time presentation moment to synchronize an reconstructed application time to said system time;
- (d) incorporating said instant in a data unit having an instant presentation moment, said instant presentation moment being associated with said correlating moment;
- 10 (e) presenting said instant at said instant presentation moment; and
- (f) instigating said event when said reconstructed application time corresponds to said correlating moment.

15

## ABSTRACT OF THE DISCLOSURE

A method and apparatus for synchronizing an event produced at a digital television receiver with an instant of a transmitted video, audio, or data element of a digital television program is disclosed. In a digital television system, a system time clock generates a timeline that is used to synchronize the presentation of the video, audio, and data elements of the television program. An application time is used in program production to synchronize instants of the several program elements. To synchronize a receiver generated event with an instant of a transmitted video, audio, or data program element, samples of the application time are transmitted to a receiver in a synchronized data service. A reconstructed application time is generated at the receiver as a function of the current system time, the application time sample, and the presentation time stamp of the data access unit in which the application time sample was transmitted. The presentation time of the program instant is associated with an application time correlating the event and the instant. The correlating application time is transmitted to the receiver as part of a synchronous or asynchronous data service and the event is instigated when the reconstructed application time corresponds to the correlating application time. A clock for generating a reconstructed application time synchronized to the system time is also disclosed.

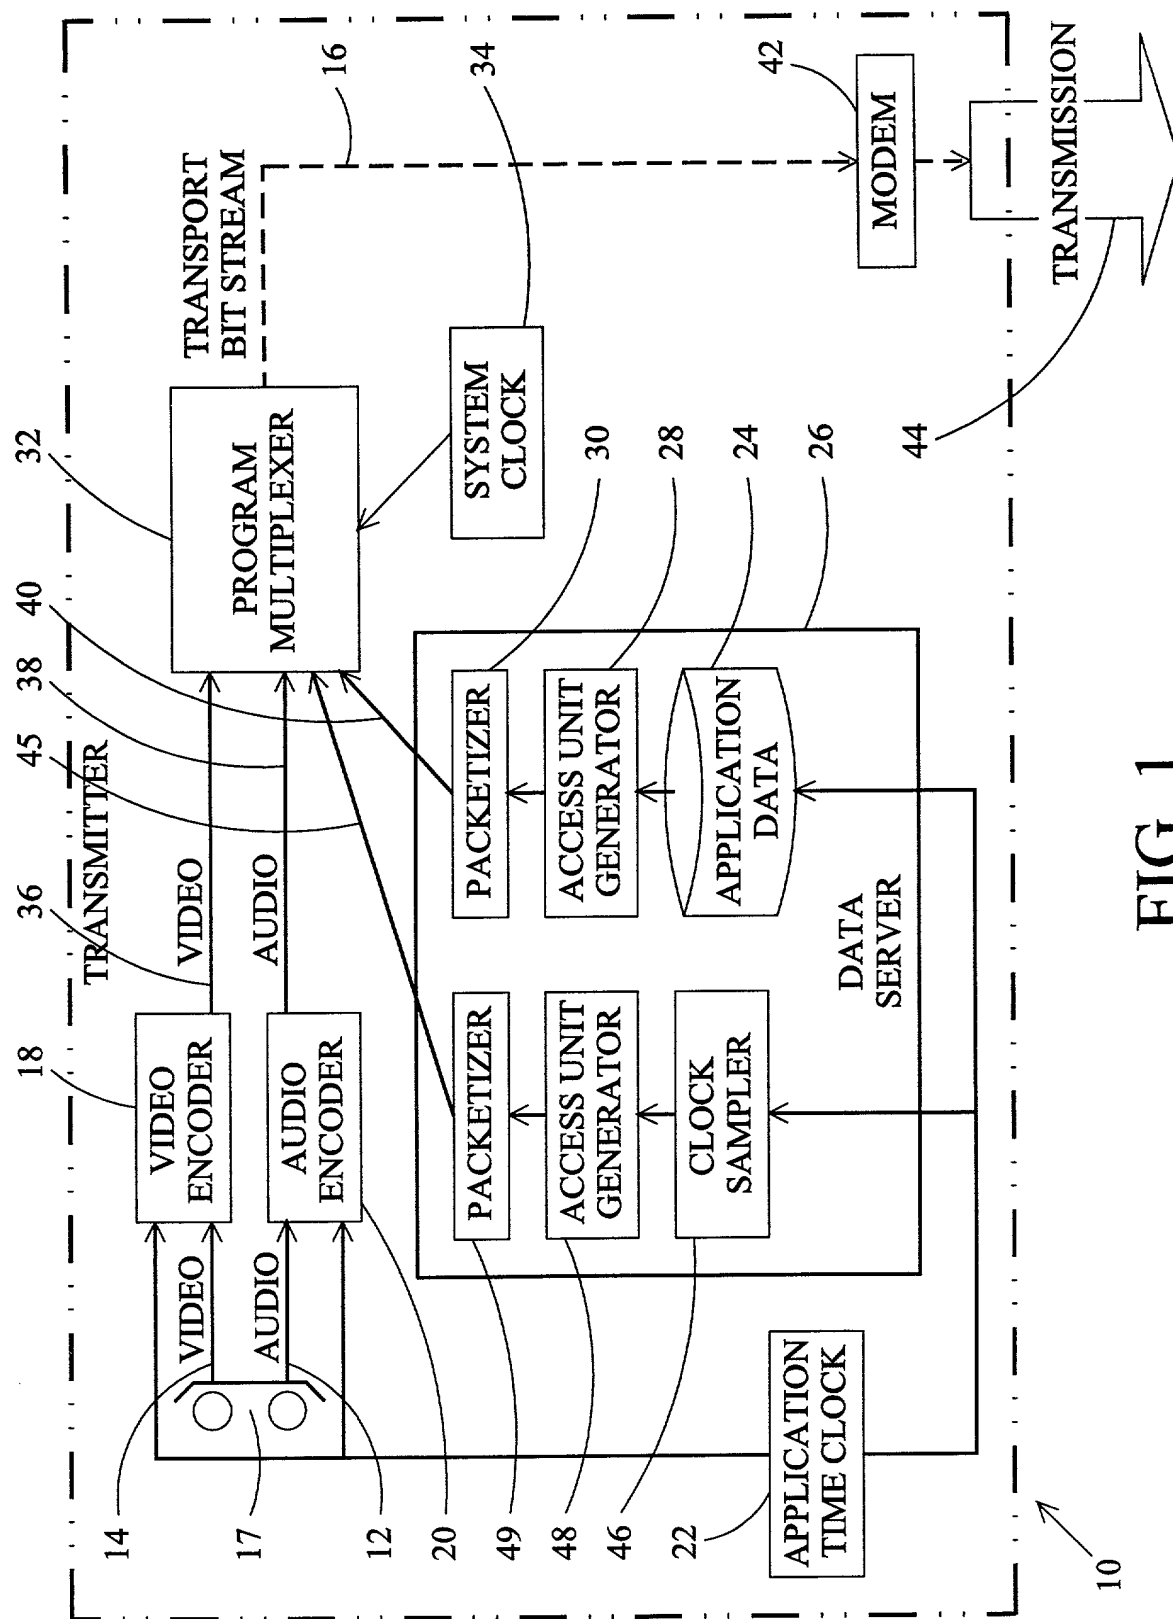

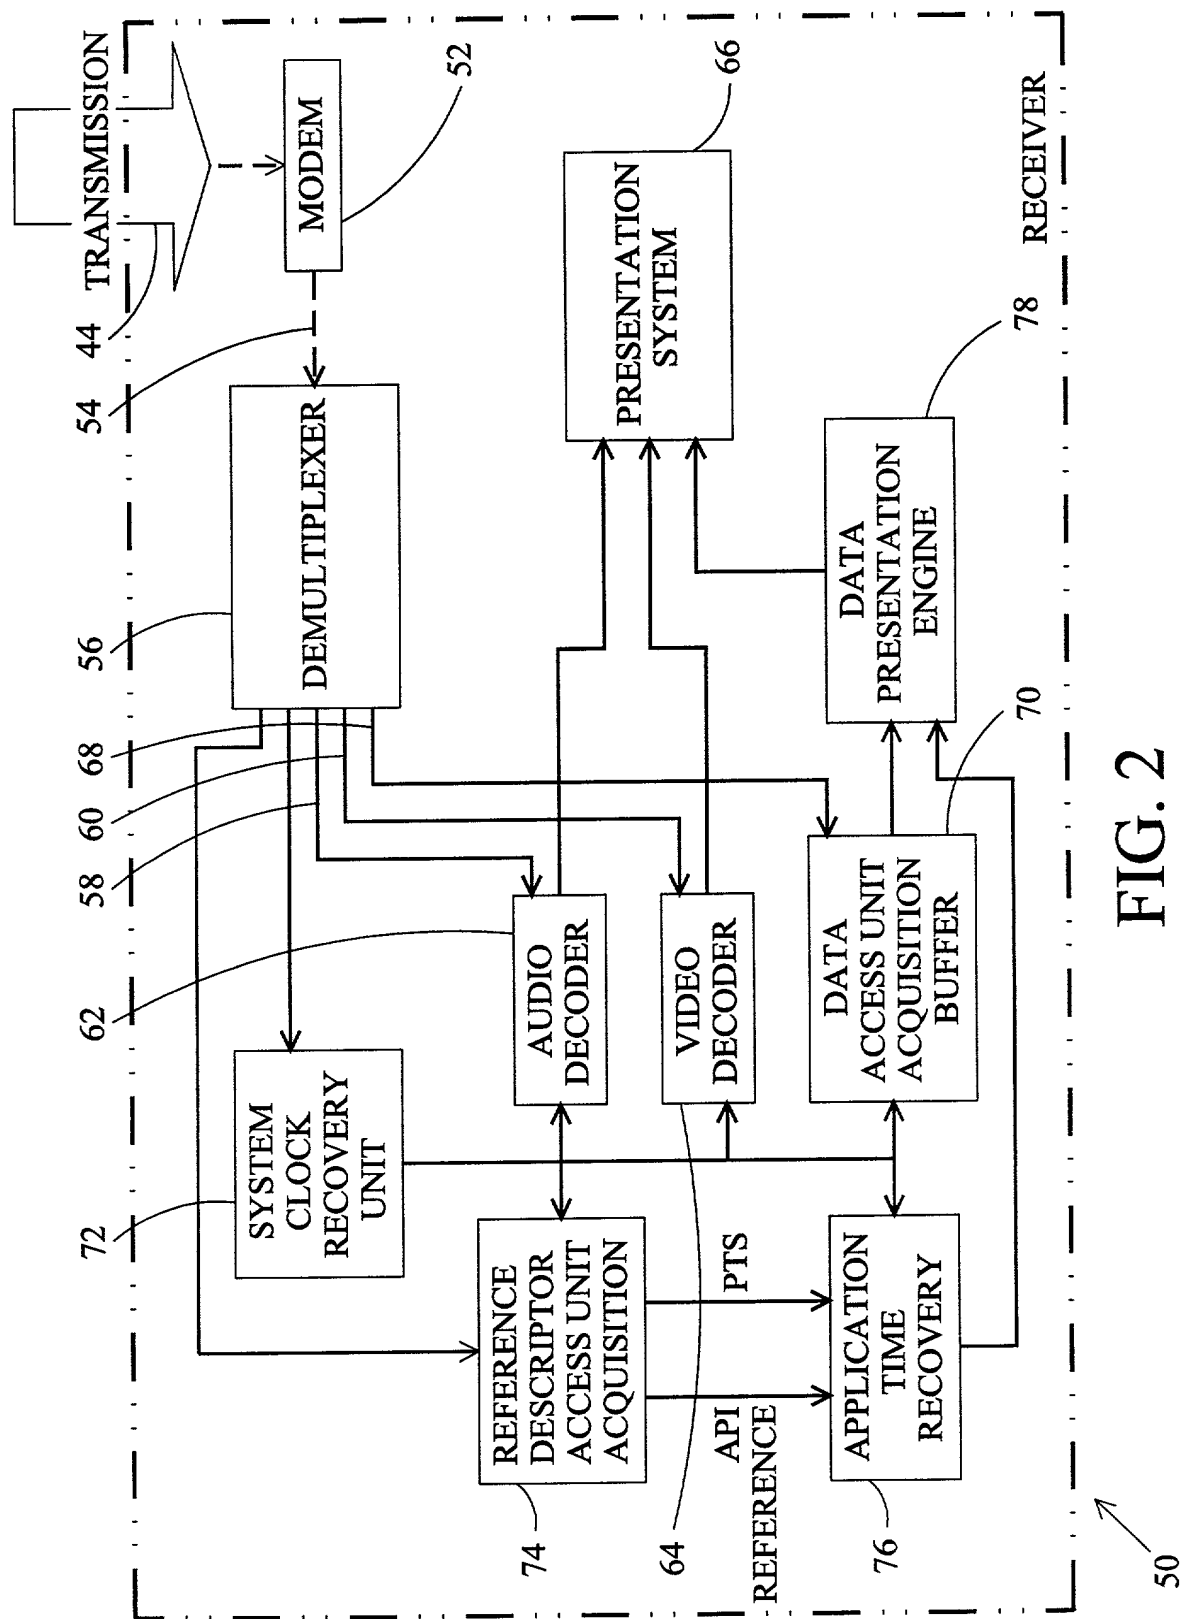


FIG. 2

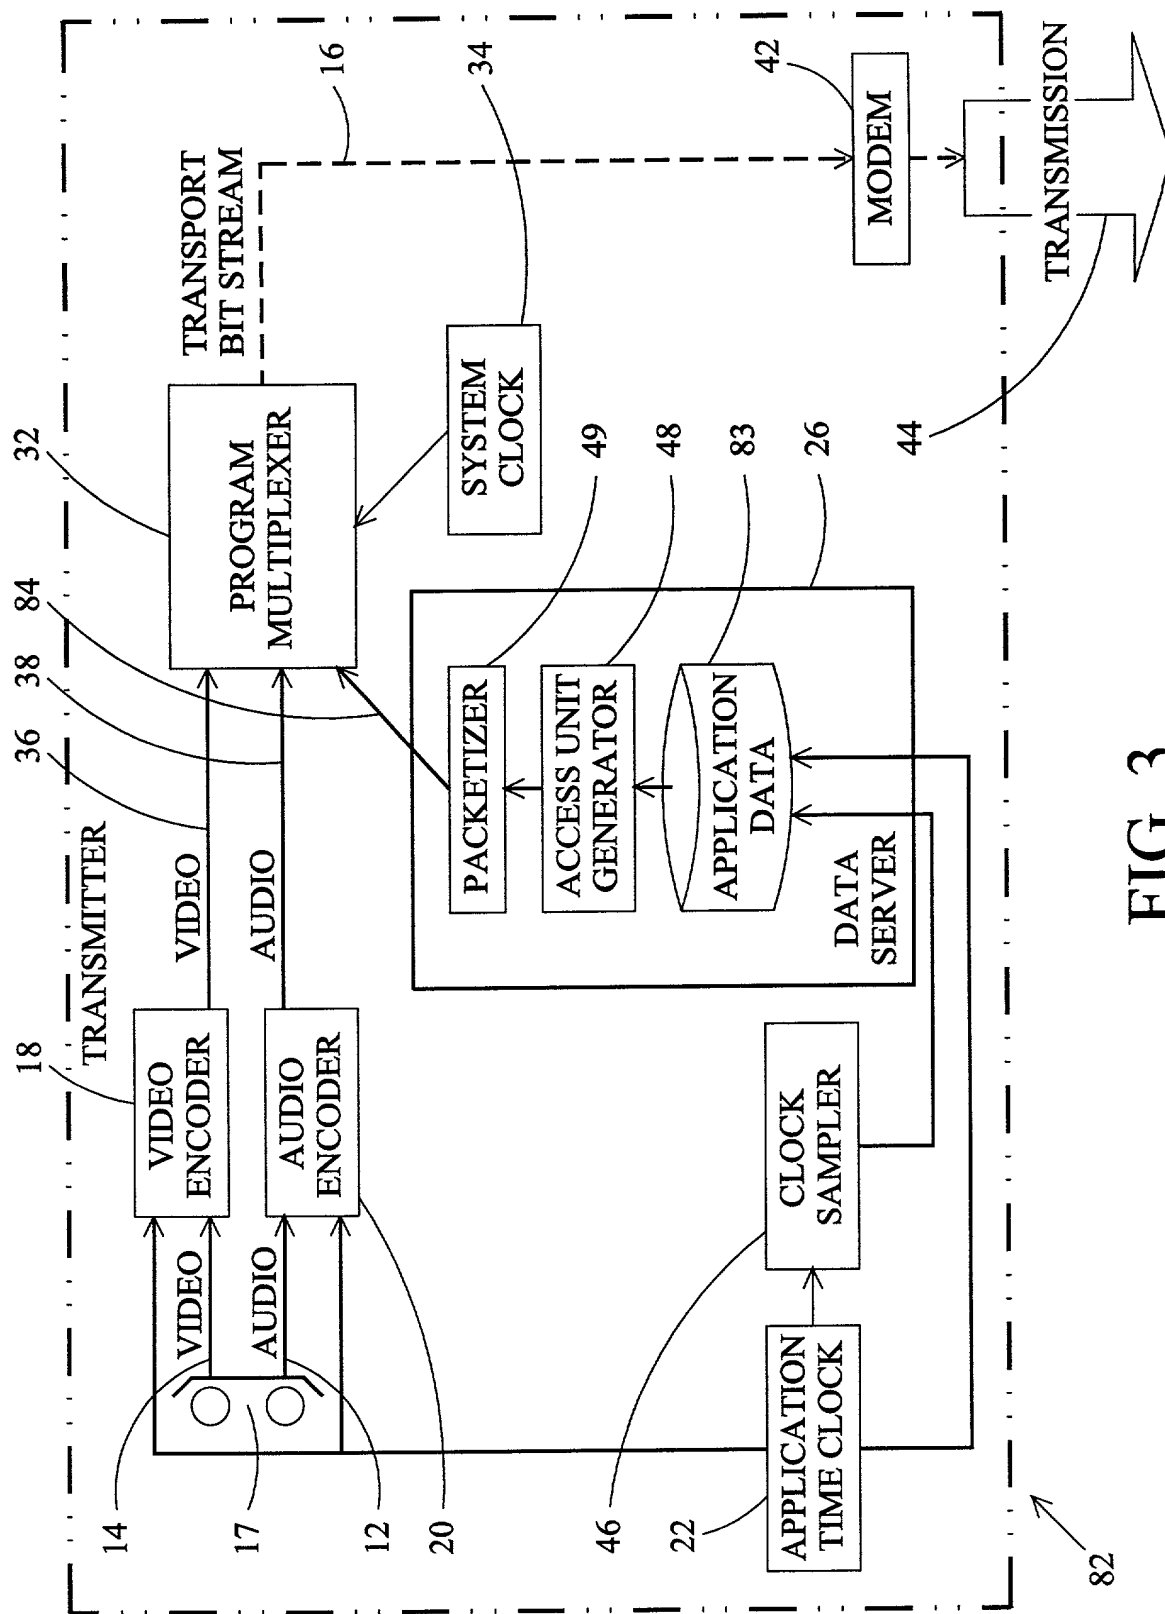


FIG. 3

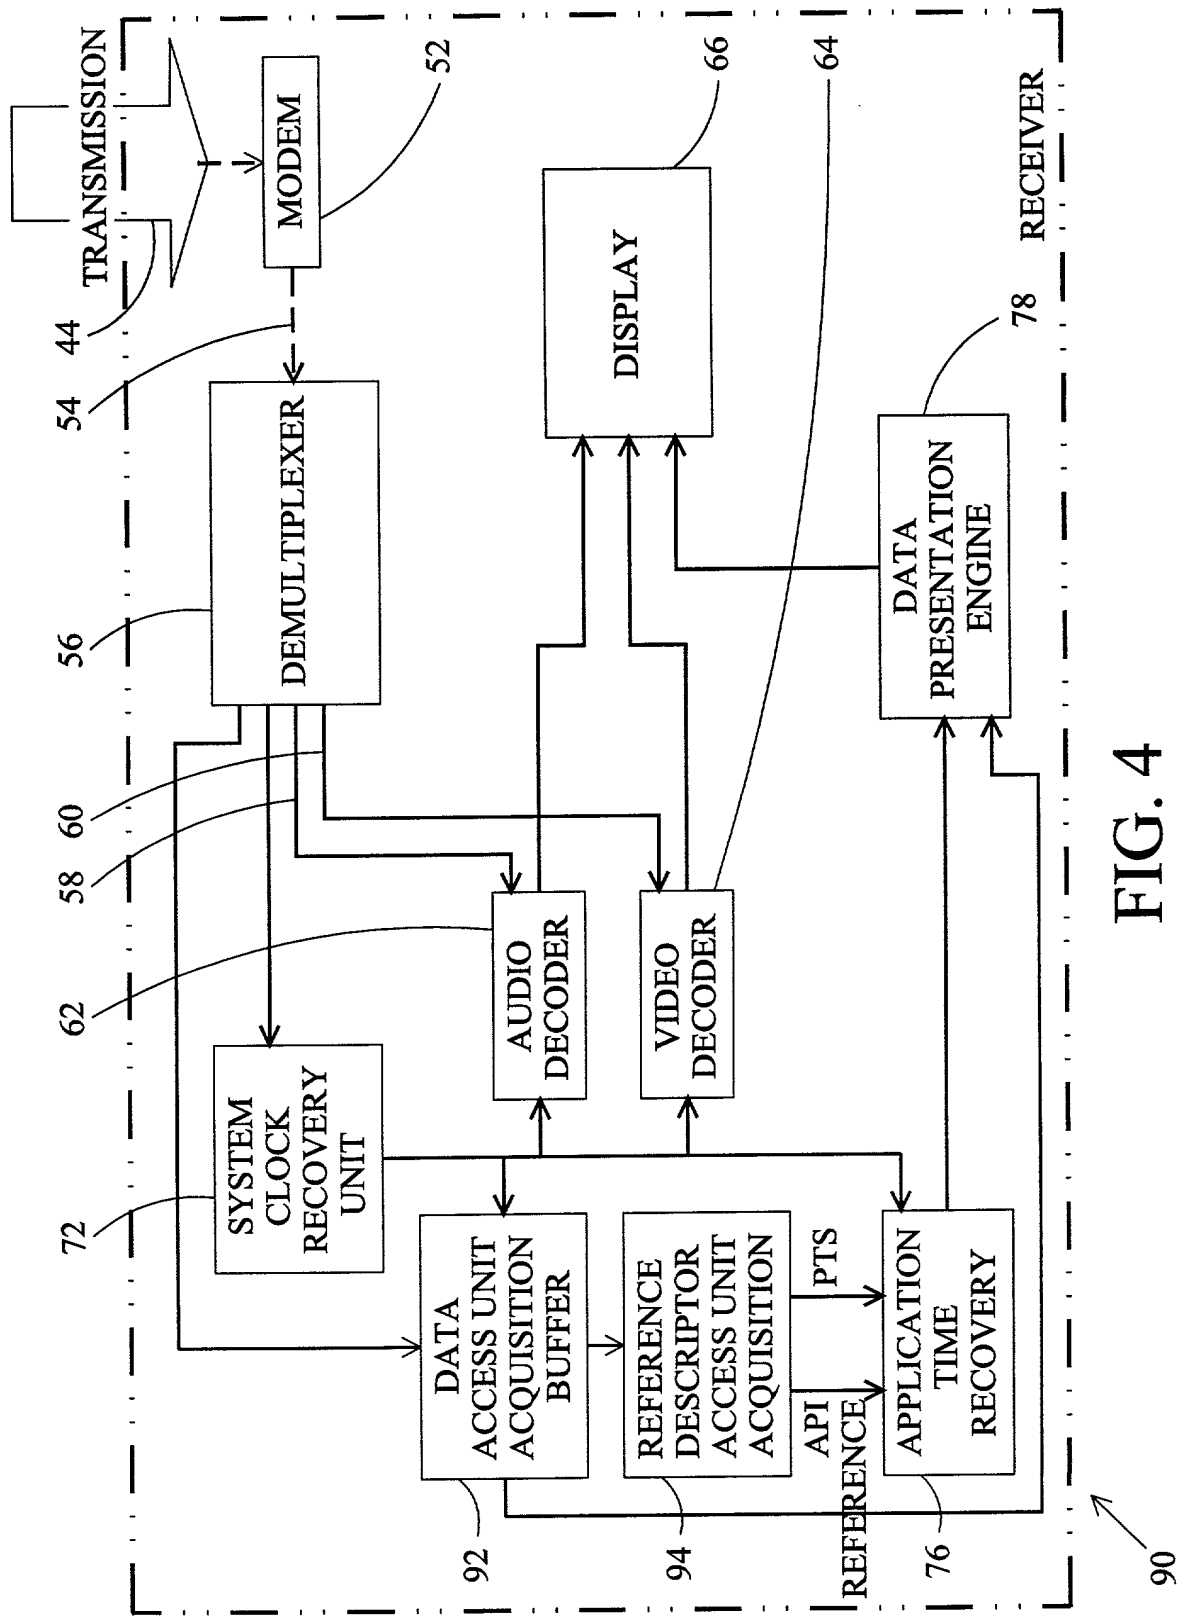


FIG. 4



100

114


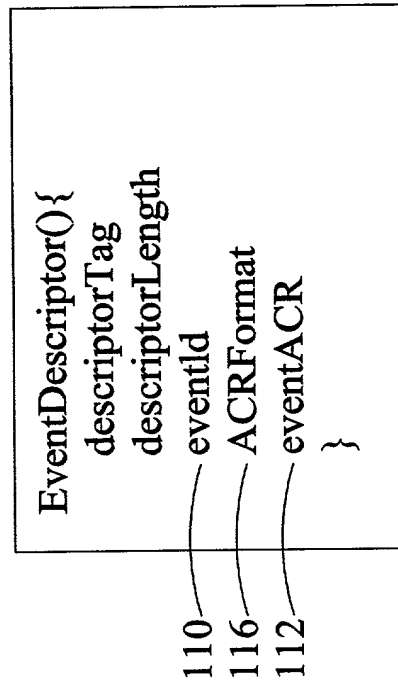


FIG. 5

FIG. 6

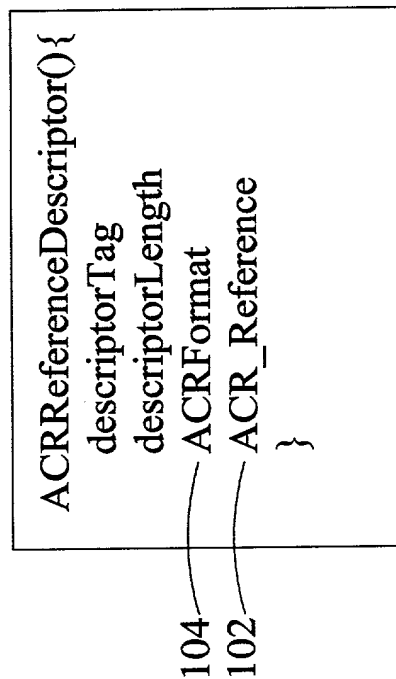

DECLARATION AND POWER OF ATTORNEY

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**METHOD OF SYNCHRONIZING EVENTS WITH A  
DIGITAL TELEVISION AUDIO-VISUAL PROGRAM**

the specification of which

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as  
Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_.  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority  
Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	[ ] Yes [ ] No
-------------------	--------------------	---------------------------------	----------------

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	[ ] Yes [ ] No
-------------------	--------------------	---------------------------------	----------------

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

_____ (Application Serial No.)	_____ (Filing Date)
-----------------------------------	------------------------

_____ (Application Serial No.)	_____ (Filing Date)
-----------------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, § 120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Ser. No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby appoint Jacob E. Vilhauer, Jr., Reg. No. 24,885, Charles D. McClung, Reg. No. 26,568, Dennis E. Stenzel, Reg. No. 28,763, Donald B. Haslett, Reg. No. 28,855, William O. Geny, Reg. No. 27,444, J. Peter Staples, Reg. No. 30,690, Kevin L. Russell, Reg. No. 38,292, Bruce W. DeKock, Reg. No. 40,585, Nancy J. Moriarty, Reg. No. 40,733, and Timothy A. Long, Reg. No. 28,876, all of the firm of Chernoff, Vilhauer, McClung & Stenzel, LLP, 1600 ODS Tower, 601 SW Second Avenue, Portland, Oregon 97204, telephone number 503-227-5631, my attorneys, jointly and individually, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Dated: January 25, 2000  
Full name of sole inventor  
Residence  
Citizenship  
Post Office Address

Regis J. Crinon  
Regis J. Crinon  
Camas, Washington  
France  
2346 NW Cascade St.  
Camas, WA 98607

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant : Regis J. Crinon

Group Art Unit:

Serial No.:

Examiner:

Filed : Filed herewith

Title : METHOD OF SYNCHRONIZING EVENTS WITH A DIGITAL TELEVISION  
AUDIO-VISUAL PROGRAM

January 27, 2000

Assistant Commissioner for Patents  
Washington, D.C. 20231

**ASSOCIATE POWER OF ATTORNEY (37 C.F.R. 1.34)**

Dear Sir:

Please recognize as Associate Practitioner in this case:

Name of Practitioner: Julie L. Reed

Address: Sharp Laboratories of American  
5750 NW Pacific Rim Blvd.  
Camas WA 98607


Reg. No. 35,349

Tel. No. (360) 817-7651

**CORRESPONDENCE**

All correspondence concerning this application is to be directed to the **principal practitioner of record** at the **address below**.

Reg. No. 28,876

  
\_\_\_\_\_  
Principal Practitioner of Record

Timothy A. Long  
Chernoff, Vilhauer, McClung & Stenzel L.L.P.  
1600 ODS Tower  
601 SW Second Avenue  
Portland, OR 97204  
(503) 227-5631